

Radial Drilling Machine Radial Drilling Machine

Model No: DI-043




Standard Accessories:

- Motor Pulley.
- Tapper Drift.
- Drill Bit Angle.

Optional Accessories:

- Electric Motor
- R/F Switch
- Drill Chuck Arbour
- Sleeve
- Key Way
- Compound Slide
- Coolant Pump with Tank
- Drill Vice

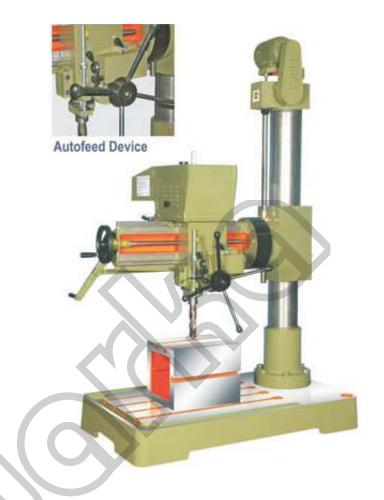

Technical Specifications

Specifications	DI-075A
Drilling capacity	40 mm
Pillar diameter	170 mm
Spindle nose to table distance	705 mm
Spindle nose to base distance	995 mm
Spindle center to pillar surface	790 mm (MAX)
Spindle center to pillar surface	790 mm (MAX)
Taper in spindle	MT-4
Number of speed	8 speed
Range of Speed (RPM)	70 to 2000
Work Table Size (in mm)	290x290x375
Base size (Machined Area)	735 x 1240 mm
Overall Base Size	745 x 1260 mm
Spindle Travel	215 mm
Pillar Length	1490 mm
Overall height with pulley guard	1960 mm
Motor 1440 RPM 3 Phase 440 volts	1.5 HP & 0.5 HP
RPRA-40A (Autofood) has same specification as that of RPR-40 model, accept it's Autofood Speed : 0.04 or 0.08	

BPRA-40A (Autofeed) has same specification as that of BPR-40 model, accept it's Autofeed Speed: 0.04 or 0.08